

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.

**THIS PAGE BLANK (USPTO)**

(12) UK Patent Application (19) GB (11) 2 259 451 (13) A

(43) Date of A publication 17.03.1993

(21) Application No 9119421.7

(22) Date of filing 11.09.1991

(71) Applicant

Frances Mary Faglione  
89-04 Doran Avenue, Glendale, New York 11385,  
United States of America

(72) Inventor

Frances Mary Faglione

(74) Agent and/or Address for Service

Eric Potter & Clarkson  
St Mary's Court, St Mary's Gate, Nottingham, NG1 1LE,  
United Kingdom

(51) INT CL<sup>a</sup>

A61F 13/15

(52) UK CL (Edition L)

A5R RPL

(56) Documents cited


GB 2170108 A GB 2144995 A

(58) Field of search

UK CL (Edition K) A5R RPG RPL  
INT CL<sup>a</sup> A61F

(54) Sanitary napkin

(57) A genital vulva pad/sanitary napkin construction (10) including a vulva pad member (12) dimensioned to be snugly received in a women's vulva and adapted to be operatively received therein and to be operatively engaged with a conventional sanitary napkin member (14) by releasable securing means (13) wherein the vulva pad member (17) functions as the primary absorption barrier to the flow of mensa.

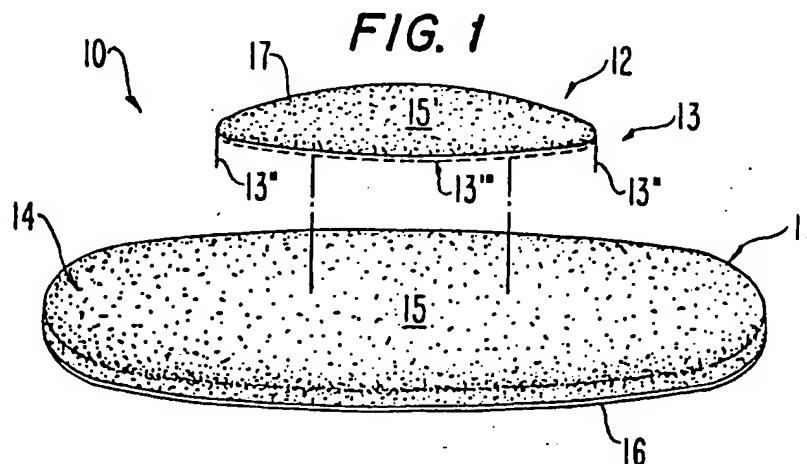


At least one drawing originally filed was informal and the print reproduced here is taken from a later filed formal copy


This print takes account of replacement documents submitted after the date of filing to enable the application to comply with the formal requirements of the Patents Rules 1990.

GB 2 259 451 A


**FIG. 1**

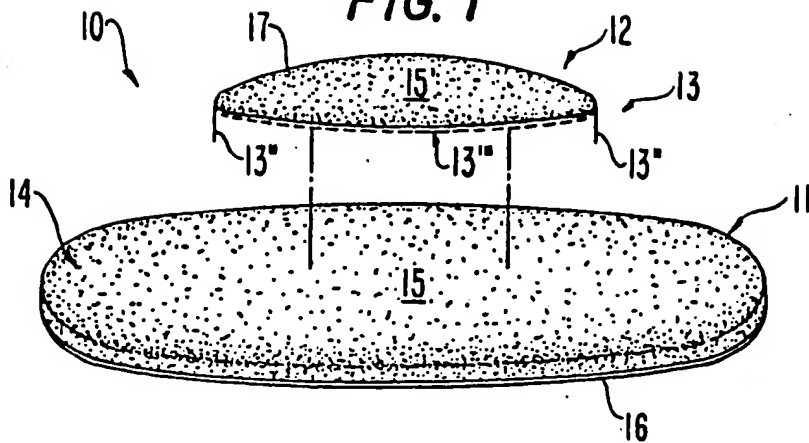


**FIG. 2**



**FIG. 3**

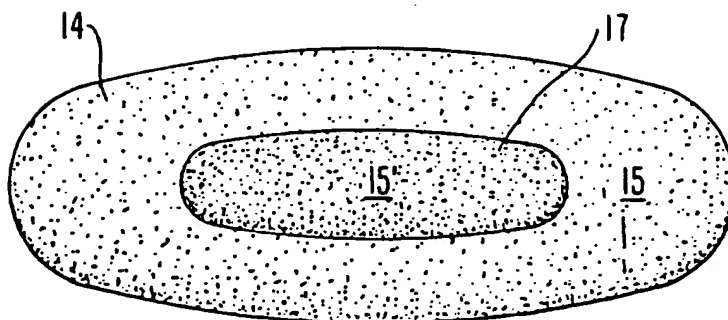

**FIG. 4**

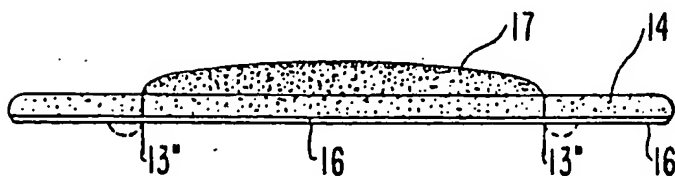

- 1 -

775671

APPLICATION FOR  
UNITED STATES LETTERS PATENT

SPECIFICATION

TO ALL WHOM IT MAY CONCERN:

Be it known that I, FRANCES M. FAGLIONE, a citizen of the United States of America and resident of Glendale, Queens County, New York, having a postal address of 89-04 Doran Avenue, Glendale, New York 11385, have invented a new and useful "GENITAL-VULVA PAD SANITARY NAPKIN CONSTRUCTION" of which the following forms the specification.

### Technical Field

The present invention relates to the field of sanitary napkins in general, and in particular to a specifically contoured sanitary napkins which are confined in a woman's vulva.

### Background Art

This invention was the subject matter of Document Disclosure Program Registration No. 228,232 which was filed in the United States Patent and Trademark Office on May 30, 1989.

As can be seen by reference to the following U.S. Patent No's. 4,678,464; 4,685,914; 4,781,713; and 4,820,295; the prior art is replete with myriad and diverse absorbent pad constructions used for personal hygiene.

While all of the aforementioned prior art constructions are more than adequate for the basic purpose and function for which they have been specifically designed, these absorbent pads still suffer from one major deficiency; that is, with regard to leakage around the periphery of the pad and the cleanliness of the woman.

Every month a woman goes through a very delicate, yet strenuous experience during her menstrual cycle. Unfortunately, the currently available sanitary pads will periodically allow the menses to leak around the sanitary napkin because the sanitary napkin shifts while the woman is walking or laying down, leaving the woman with blood stains on her cloths and/or bed sheets which causes a great deal of embarrassment for her. This is especially more so when there is a heavy flow of the menses due to childbirth, an abnormality of the lining of the vagina, or other medical reasons.

As a consequence of the foregoing situation, there has existed a longstanding need among females for a sanitary napkin construction that will virtually preclude the menses from spreading beyond the vulva no less being able to leak beyond the confines of the napkin surface. The provision of such a construction is a stated objective of the present invention.

#### Disclosure Of The Invention

Briefly stated, the genital vulva pad sanitary napkin construction of the present invention comprises a sanitary napkin unit releasably and operably associated with a vulva pad unit.

The sanitary napkin unit comprises an otherwise conventional sanitary napkin member having a relatively standard elongated configuration and fabricated from a generally thick sheet of absorbent, porous material having in some instances, a waterproof layer.

The vulva pad unit comprises a generally elliptical absorbent pad member having releasable securing means which allow the vulva pad unit to be operatively attached to the sanitary napkin member until such time as the absorbent pad member must be replaced with a fresh pad member.

As will be explained in greater detail further on in the specification, the vulva pad member is dimensioned and configured to fit inside a woman's vulva between the labia minora, whereby the majority of the menses will be trapped and absorbed within the confines of the vulva by the vulva pad member and any excess will be deposited and absorbed by the sanitary napkin member.

In addition, this invention will be effective in containing the menses inside the vulva where there is less chance of being smeared on the outside of the vulva and the vulva hair; which will make the woman feel cleaner because she is cleaner.

Furthermore, the releasable securing means allows the absorbent vulva pad member to be removed and replaced as often

as the woman wishes. If the menstrual flow is heavy and the sanitary napkin is stained, it also has to be replaced, or in the event that the menstrual flow is light, the user may replace the vulva pad member and simply continue to wear the sanitary napkin member until the menses ceases to flow.

The genital vulva pad/sanitary napkin construction of this invention can also be used to keep a woman clean and odor free. For example, if a woman has a vaginal discharge or a slight leakage from her bladder, she can change the absorbent pad member as often as she wants, to keep herself clean and odor free.

In addition, due to numerous deaths attributed to toxic shock syndrome, the provision of the present invention may contribute to the prevention of this disease since the absorbent vulva pads are situated outside of the vagina to collect and subsequently remove any drainage that flows through the vagina. Therefore, it will not have the opportunity to breed bacteria inside the vagina.

#### Brief Description Of The Drawings

These and other attributes of the invention will become more clear upon a thorough study of the following description of the best mode for carrying out the invention, particularly when reviewed in conjunction with the drawings, wherein:

Fig. 1 is an exploded perspective view of the genital vulva pad/sanitary napkin construction that forms the basis of this invention;

Fig. 2 is a front elevation view;

Fig. 3 is a top plan view; and,

Fig. 4 is a side elevation view.

#### Best Mode For Carrying Out The Invention

As can be seen by reference to the drawings, and in particular to Fig. 1, the genital vulva pad/sanitary napkin construction that forms the basis of the present invention is designated generally by the reference numeral (10).

The construction (10) comprises in general a sanitary



napkin unit (11), a vulva pad unit (12), and releasable securing means (13). These units will now be described in serialatin fashion.

As can be seen by reference to Figs. 1 through 4, the sanitary napkin unit (11) comprises in general a conventional sanitary napkin member (14) having a generally elongated configuration and fabricated from relatively thick absorbent material (15) which is optionally provided with a moisture proof layer (16) on the bottom surface of the absorbent material (15).

As can also be appreciated by reference to Figs. 1 through 4, the vulva pad unit (12) comprises a generally elliptical vulva pad member (17) which is also fabricated from an absorbent material (15') wherein the periphery of the vulva pad member (17) is dimensioned and configured to snugly fit a woman's vulva between the labia minora.

Turning now to Fig. 3, it can be seen that the vulva pad member (17) is substantially shorter and narrower than the sanitary napkin member (14) whereby when the vulva pad member (17) is centrally disposed on the napkin member (14) there is a substantially absorbent surface area on the sanitary napkin member (14) which surrounds and projects beyond the outer edges of the vulva pad member (17).

As can best be seen by reference to Figs. 1, 2, and 4, the vulva pad member (17) is operably and releasably secured to the sanitary napkin member (14) by releasable securing means (13) which temporarily adhere the bottom of the vulva pad member (17) to the top of the sanitary napkin member (14).

The releasable securing means (13) for the purposes of this invention can comprise any suitable securing members such as threads or strings (13') or flexible tangs (13'') which are capable of penetrating engagement with the absorbent material (15) of the sanitary napkin member (14), which will allow the temporary engagement and subsequent disengagement of the vulva pad member (17) relative to the sanitary napkin member (14)

when it is time to remove and/or replace the vulva pad member.

Having thereby described the subject matter of the present invention, it should be apparent that many substitutions, modifications and variations of the invention are possible in light of the above teachings. It is therefore to be understood that the invention as taught and described herein is only to be limited to the extent of the breadth and scope of the appended claims.

CLAIMS

1. A genital vulva pad/sanitary napkin construction for absorbing mensa flow through a woman's vulva wherein the construction comprises:

5 a sanitary napkin unit including a conventional sanitary napkin member fabricated from an absorbent material; and,

a vulva pad unit operatively associated with the sanitary napkin unit wherein the vulva pad comprises a  
10 generally elliptical vulva pad member fabricated from an absorbent material wherein the vulva pad member is dimensioned and configured to fit inside a woman's vulva.

2. The construction as claimed in Claim 1 further comprising:

15 a releasable securing means for operatively attaching and disengaging the vulva pad member from the sanitary napkin member.

3. The construction as in Claim 1 wherein the vulva pad member is generally centrally disposed on top of the  
20 sanitary napkin member.

4. The construction as in Claim 3 wherein the length and width of the vulva pad member are significantly smaller than the length and width of the sanitary napkin member whereby there is a substantial surface area of the  
25 absorbent material of the sanitary napkin member which surrounds the outer edges of the vulva pad member.

5. The construction of Claim 2 wherein the releasable securing means comprise threads.

6. The construction of Claim 2 wherein the releasable securing means comprise flexible tangs.

7. A genital vulva pad/sanitary napkin construction for absorbing mensa flow through a woman's vulva wherein the  
5 construction consists of

a sanitary napkin unit including a sanitary napkin member fabricated from an absorbent material;

a removable and replaceable vulva pad unit operatively associated with the sanitary napkin unit wherein the vulva  
10 pad unit comprises an elliptical vulva pad member fabricated from an absorbent material; and, wherein the vulva pad member is fabricated from an absorbent material and is dimensioned and configured to fit inside a woman's vulva; and the vulva pad member is generally centrally  
15 disposed on top of, and spaced a substantial distance from the sides of the sanitary napkin member whereby there is a substantial surface area of the absorbent material of the sanitary napkin member which surrounds the outer edges of the vulva pad member; and,

20 releasable securing means spaced from one another and fixedly attached on one end to the vulva pad member and having the other end penetratingly yet releasably engaged with the absorbent material of said sanitary napkin member for releasably securing the vulva pad member to the  
25 sanitary napkin member; wherein, the releasable securing means comprise flexible tangs.



Category	Identity of document and relevant passages	Relevant to claim(s).

#### Categories of documents

**X:** Document indicating lack of novelty or of inventive step.

**Y:** Document indicating lack of inventive step if combined with one or more other documents of the same category.

**A:** Document indicating technological background and/or state of the art.

**P:** Document published on or after the declared priority date but before the filing date of the present application.

**E:** Patent document published on or after, but with priority date earlier than, the filing date of the present application.

**&** Member of the same patent family, corresponding document.

**Databases:** The UK Patent Office database comprises classified collections of GB, EP, WO and US patent specifications as outlined periodically in the Official Journal (Patents). The on-line databases considered for search are also listed periodically in the Official Journal (Patents).